

RECOMMENDED TOOLS: Tape measure, Level, Pencil, Electrical drill, and Stud finder

PACKAGE CONTENTS

QTY	Description	
24	O-Rings	OPTIONAL: 0-RINGS FOR ADDITIONAL STABILITY SLIDE 0-RING 1 1/2" DOWN THE PEB
1 set of 2	Ultra ST Rails	
8	Drywall Anchors	
8	1.25" Mounting Screws	
7	Screw Hole Caps	
	*Spare parts may be included.	~

INSTALLATION STEPS

IMPORTANT: Before installing, check package contents for missing or damaged items and ensure all pegs are tight and secure prior to mounting.

STEP 1: FIND DESIRED LOCATION

Use stud finder to assist in mapping out mounting locations. Place one rail against wall in desired location.

STEP 2: MARK MOUNTING HOLES

Ensure the rail is straight by placing a level against the side of the rail. Use a pencil to mark mounting holes and set the rail aside.

PRO TIP: If marked mounting holes are on a wood stud or backing, you do not need the drywall anchors but only the wood screws. If on drywall, you will need to install the drywall anchors before installing the rail.

STEP 3: MOUNT THE FIRST RAIL

Hold up rail to align mounting holes and mount rails. Drill the wood screw directly through the holes into the wood stud or into the anchor if installing on drywall.

STEP 4: MOUNT THE SECOND RAIL

Place the second rail parallel to the mounted rail. The distance requirement is 1" max between rails or 1½ from center to center of screw location


Repeat steps 2 and 3 to mount the second rail.


PRO TIP: If you are mounting multiple sets, the minimum space between rail sets is 1½" to ensure that your bottles don't touch.

STEP 5: INSTALL SCREW HOLE CAPS & O-RINGS

Add the finishing touches by inserting screw hole caps on the face of the rack, and slide the o-ring 1½" down the peg.

STEP 6: ADD WINE BOTTLES & ENJOY!

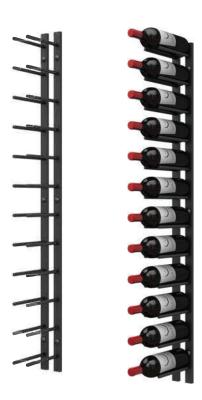



Rail mounting distance

